MOUNTING INSTRUCTION

Ceiling/wall bracket

No. 148783/00
Date 2006-02-01

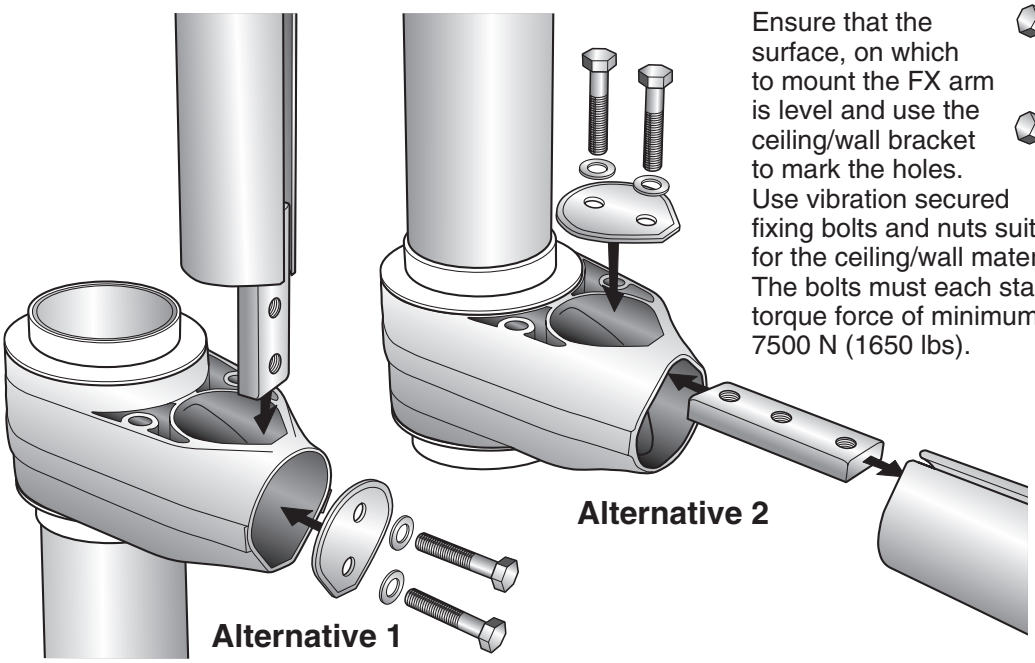

Ensure that the surface, on which to mount the FX arm is level and use the ceiling/wall bracket to mark the holes. Use vibration secured fixing bolts and nuts suitable for the ceiling/wall material. The bolts must each stand a torque force of minimum 7500 N (1650 lbs).

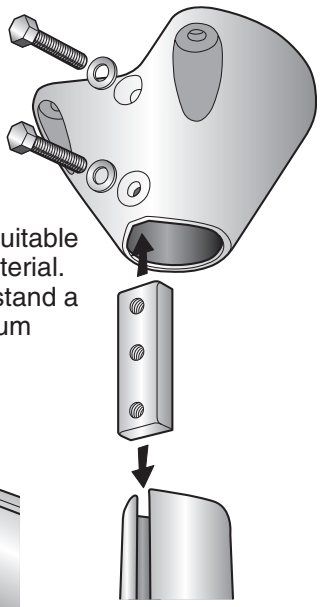

Mounting examples

N.B. These mounting examples are not applicable for all FX arms. For possible mounting examples, see the Instruction Manual for the FX arm.
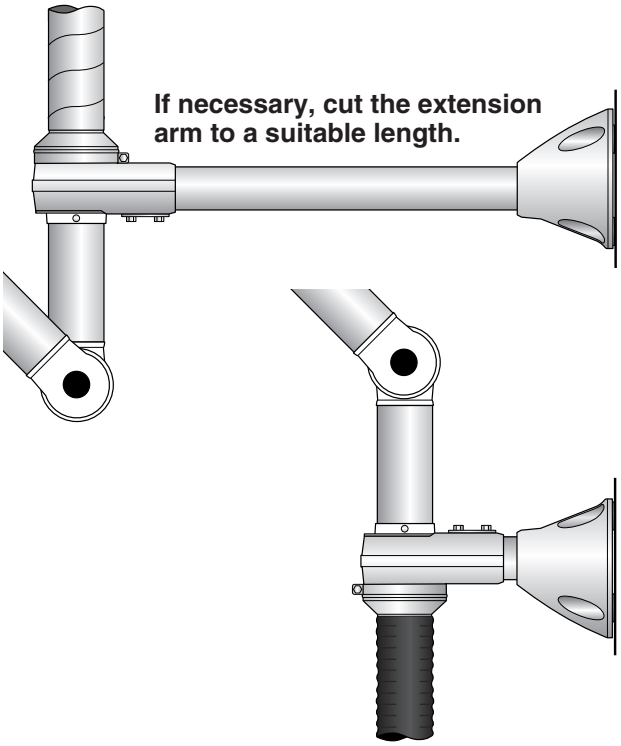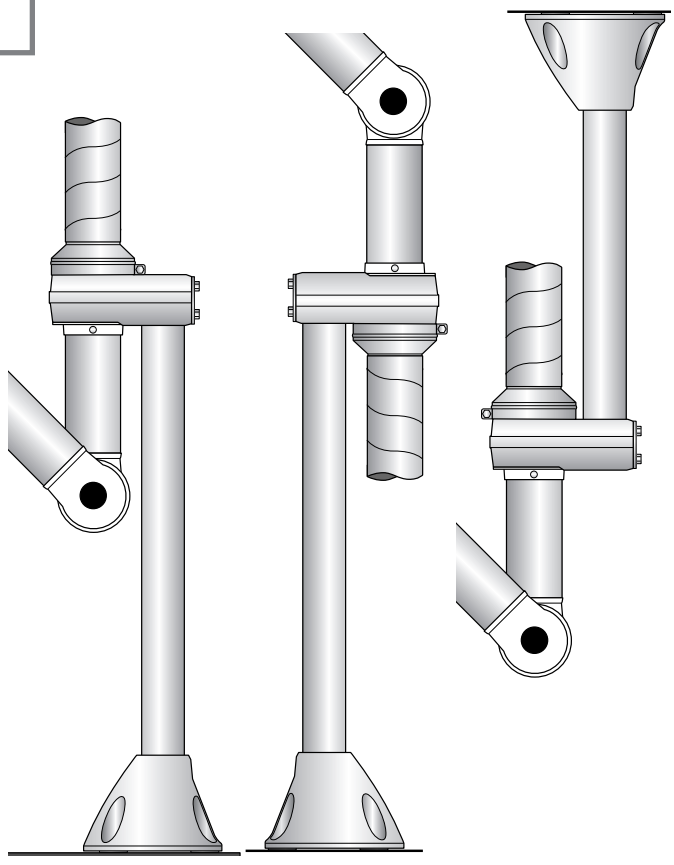
If necessary, cut the extension arm to a suitable length.